


# Coil Winder TD4T Flywinder

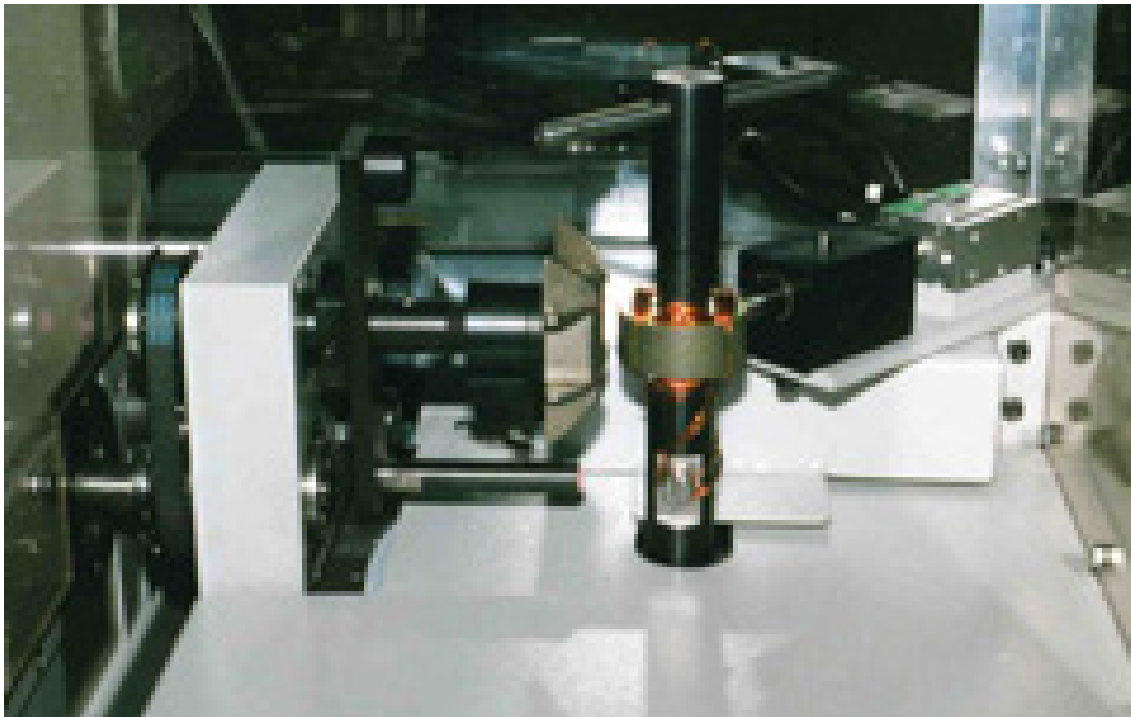

## TECHNICAL SPECIFICATIONS

**Wire Pitching:** Up to 1mm  
**Winding Length:** Up to 20mm  
**Rotor Diameter:** 25-80mm  
**Rotor Width:** Up to 40mm  
**Spindle Speed:** Variable up to 2,000 rpm  
**Supply:** 240V 50 Cycles 10 Amp  
**Motor:** 0.75 kW

## CONTROL SYSTEM

**Start Sequence:** Push button  
**Table Index:** Manual/pneumatic  
**Table in/out:** Manual/pneumatic  
**Rotor Clamping:** Pneumatic  
**Rotor Positioning:** Spring-loaded plunger/  
 pneumatic

CNC 210s- incorporating 1,000 winding programmes, each programme dictating number of turns, acceleration, deceleration, winding speed, pitch, direction of rotation and flyer stopping position

**Tension Control:** Azonic 4C3000 (for wires 0.3-1.5mm)



Unit 5, Bawdon Lodge Farm, Charley Rd. Nanpantan, Leicestershire, LE12 9YE  
 Phone: +44 (0) 1509 239 832 • Fax: +44 (0) 1509 239 837  
 e-mail: sales@td-engineering.com  
 web: td-engineering.com

OR  
CONTACT:

**WYREPAK INDUSTRIES**  
 wyrepakdave@yahoo.com  
 USA phone: 860-632-5477